

Retro-fit sediment control



Specifically designed to contain sediment, trash and control construction site run off:

- Designed for flat & combination curb catch basins
- Holds up to 1100lbs of sediment and debris
- Capable of reducing hydrocarbons
- Durable frame with replaceable bags

The StormSack assists municipalities, storm water managers and contractors in meeting the EPA's NPDES's Phase II storm water regulations regarding runoff from new construction site activities. Unlike most sediment bags the StormSack is designed to last.

Using the latest in geotextile technology the StormSack offers high flow rates (110 gpm per square foot) and has an optional oil absorption boom. The StormSack can also be fitted with a metal cage to facilitate cleaning using large vac trucks.

The StormSack is available in over 400 sizes and comes standard with a patented adjustable aluminum flange.

- Options include:**
- Two bag depths 15" and 30"
 - Replaceable Oil Boom
 - Reinforcement cage


The StormSack's unique liner captures sediments while maintaining high flow rates.



Unlike most sock products, the StormSack's durable frame is designed to last for years the geotextile bags are replaceable.



StormSack features *fabco technology*

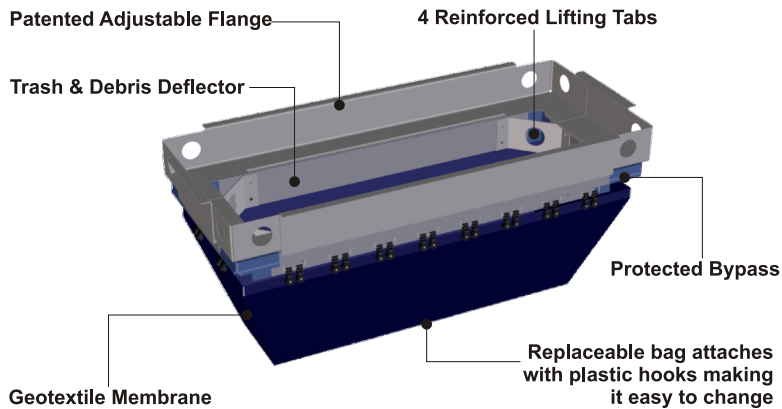

DISTRIBUTED BY



StormSack is a registered trademark of Fabco Industries Inc.
www.fabco-industries.com tel 1-631-244-3536

StormSack sizes & capacities



The StormSack is available in 18 basic sizes which can be adjusted to a specific size using the adjustable flange. To select the correct product for your needs the size should be taken from the catch basin grate. Example; a 24" x 48" grate would require a 9748-1 part number, then add the installation kit letter for a deep flange "C" therefore your final part number would be 9748-1C.*

Width from 21" to 24"

Width from 25" to 30"

Width from 31" to 36"

Length from 27" to 31"

Part Number	9748-6X
Sack size:	18" x 24"
Oil adsorb capacity	1.30 gallons
Filtered flow rate	1163 gpm
Bypass flow rate	909 gpm
Debris capacity	2.2 cubic ft

Part Number	9749-6X
Sack size:	22" x 24"
Oil adsorb capacity	1.45 gallons
Filtered flow rate	1368 gpm
Bypass flow rate	1011 gpm
Debris capacity	2.8 cubic ft

Custom sizes available
ask for details

Flow rates calculated on a
15" depth replaceable bag
double the flow rates
for 30" depth bag

Replaceable oil boom
available on all StormSack
configurations

Length from 32" to 35"

Part Number	9748-5X
Sack size:	18" x 28"
Oil adsorb capacity	1.45 gallons
Filtered flow rate	1355 gpm
Bypass flow rate	1008 gpm
Debris capacity	2.6 cubic ft

Part Number	9749-5X
Sack size:	22" x 28"
Oil adsorb capacity	1.65 gallons
Filtered flow rate	1564 gpm
Bypass flow rate	1114 gpm
Debris capacity	3.3 cubic ft

Length from 36" to 38"

Part Number	9748-4X
Sack size:	18" x 32"
Oil adsorb capacity	1.62 gallons
Filtered flow rate	1508 gpm
Bypass flow rate	1114 gpm
Debris capacity	3.0 cubic ft

Part Number	9749-4X
Sack size:	22" x 32"
Oil adsorb capacity	1.80 gallons
Filtered flow rate	1758 gpm
Bypass flow rate	1215 gpm
Debris capacity	3.9 cubic ft

Length from 39" to 43"

Part Number	9748-3X
Sack size:	18" x 36"
Oil adsorb capacity	1.80 gallons
Filtered flow rate	1680 gpm
Bypass flow rate	1220 gpm
Debris capacity	3.4 cubic ft

Part Number	9749-3X
Sack size:	22" x 36"
Oil adsorb capacity	1.95 gallons
Filtered flow rate	1953gpm
Bypass flow rate	1302 gpm
Debris capacity	4.4 cubic ft

Part Number	9750-3X
Sack size:	28" x 36"
Oil adsorb capacity	2.25 gallons
Filtered flow rate	2421 gpm
Bypass flow rate	1486 gpm
Debris capacity	5.8 cubic ft

Length from 44" to 47"

Part Number	9748-2X
Sack size:	18" x 40"
Oil adsorb capacity	2.00 gallons
Filtered flow rate	1854 gpm
Bypass flow rate	1284 gpm
Debris capacity	3.8 cubic ft

Part Number	9749-2X
Sack size:	22" x 40"
Oil adsorb capacity	2.20 gallons
Filtered flow rate	2148 gpm
Bypass flow rate	1436 gpm
Debris capacity	4.9 cubic ft

Part Number	9750-2X
Sack size:	28" x 40"
Oil adsorb capacity	2.40 gallons
Filtered flow rate	2592 gpm
Bypass flow rate	1571 gpm
Debris capacity	6.6 cubic ft

Length from 48" to 52"


Part Number	9748-1X
Sack size:	18" x 44"
Oil adsorb capacity	2.20 gallons
Filtered flow rate	2026 gpm
Bypass flow rate	1390 gpm
Debris capacity	4.2 cubic ft

Part Number	9749-1X
Sack size:	22" x 44"
Oil adsorb capacity	2.30 gallons
Filtered flow rate	2344 gpm
Bypass flow rate	1526 gpm
Debris capacity	5.5 cubic ft

Part Number	9750-1X
Sack size:	28" x 44"
Oil adsorb capacity	2.55 gallons
Filtered flow rate	2820 gpm
Bypass flow rate	1677 gpm
Debris capacity	7.3 cubic ft

Flat adjustable flange


The StormSack flat adjustable flange is designed for drop inlets with flat grate covers. It offers adjustment of up to 4" when installing in a catch basin.

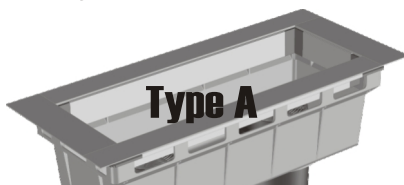

Type A

Deep adjustable flange


The StormSack deep adjustable flange is designed for drop inlets with grate covers that are not flat on the under side. The deep flange offers similar adjustment as the flat flange.

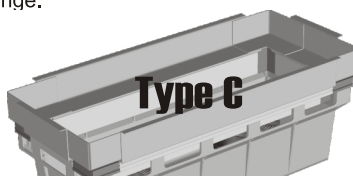

Type C

Deep adjustable flange open curb

The StormSack deep adjustable flange open curb is designed for combination drop/open curb inlets. The rear deflector redirects flow from the curb opening into the StormSack.

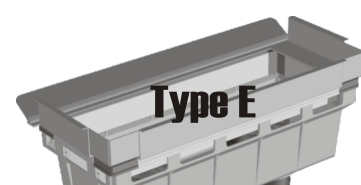

Type E

* The measurement guidance is based on the assumption of a 1" ledge around the catch basin frame.