


# INSTALLATION GUIDE


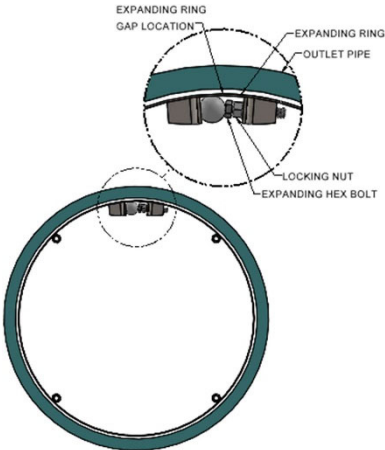
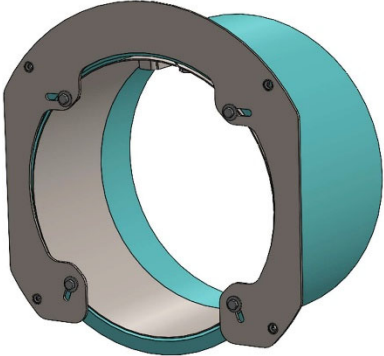
## CPS WITH EXPANDED STORMRING BY: FABCO INDUSTRIES

### ITEMS INCLUDED

- Removable Front Cover
- Black Plate
- Transition Plate
- Expanding Ring
- Nuts and Bolts Packet

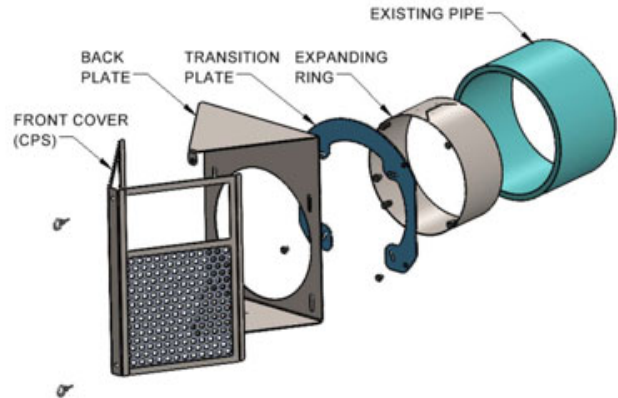


### INSTALLATION PROCESS

Step 1	Step 2	Step 3
<p>Before installing the expansion ring, verify that the inside of the pipe is free of dirt, sediment, and debris that might inhibit direct contact between the expanding ring and the pipe.</p> 	<p>Insert the expanding ring into the pipe, with the gap located at the top. Slide the ring until the front edge is flush with the structure/wall face.</p> <p>Then, turn the hex bolt to expand the ring against the pipe. With the ring firmly against the pipe, lock the ring by holding the hex bolt and turning the locking nut clockwise.</p> 	<p>Align the transition plate to the slotted holes. Plumb and secure the plate to the expanding ring with the provided <math>\frac{3}{8}</math>" bolts and washers.</p> 

## INSTALLATION PROCESS (CONT.)

### Step 4

Align and attach the backplate to the transition plate using the bolts, washers, and spacers provided.

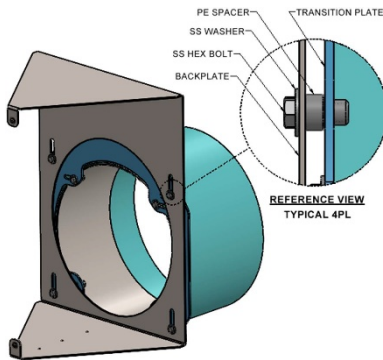

### Step 5

The removable front cover attaches directly to the backplate using the two (2) eye nuts provided. Do not over-tighten eye nuts. The cover should be removable for the regular scheduled maintenance operations.



### Step 6

After completing the StormRing installation process, resecure the worksite. Remove any remnant debris from the installation and that may cause pedestrian or traffic hazards.

For best performance, it is recommended that regular scheduled maintenance operations be performed in accordance with Fabco's StormRing Operation and Maintenance Guide.

For additional information on this and all Fabco products, please visit our website at [www.fabco-industries.com](http://www.fabco-industries.com)